


Dimensional Drawing

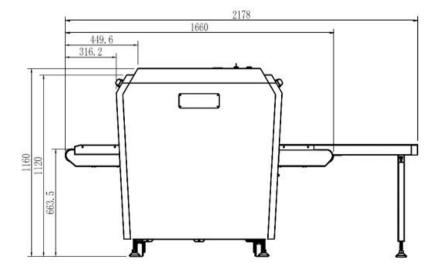

746

Important Sizes:

Product Size: 2178* 746 * 1160mm (L \times W \times H) Tunnel Size: 503* 295.5mm (width \times height)





General Specifications

Wire Resolution Typical AWG38
Penetration resolution Typical AWG34

Spatial resolution Vertical:1.3mm, horizontal:1.3mm

Penetration Typical 6mm

Resolution of organic matter

Grayscale and mixture resolution 1-40mm

Resolution of inorganic objects /
Effective material resolution /

X-Ray dosage each inspection $\leq 3.0 \mu \text{Sv (uGy)}$ Boundary Leakage $\leq 2.0 \mu \text{Sv /h(uGy/h)}$

S/N ratio <60dB
Conveyor speed 0.2m/s
Conveyor max load 200kg
Power consumption 0.5KW

Safety performance requirements Meet the requirements of GB15208.1-2005

EMC requirements Meet the requirements of GB15208.1-2005

Electrical safety Meet the requirements of GB15208.1-2005

Environmental applicability Meet the requirements of GB15208.1-2005

≤5.0mA

Film Safety Guarantee ASA/ISO1600 Film

Weight 250kg

Operation temperature/Humidity $5^{\circ}-40^{\circ}/0\%-90\%$ Storage temperature/Humidity $-20^{\circ}-60^{\circ}/10\%-90\%$ Atmospheric pressure 86kPa-106kPa AC

Operation Power 220V(±10%-15%) 50±3Hz

Operation system LINUX

General Specifications

Leakage current

X ray generator 80KV, oil cooling, from bottom to top

Electric roller DGBL-76-380L

Computer Hard drive: 500G, Storage: 1G

Monnitor 21.5" LED screen, resolution: 1280*1024 pixels

Operation console Single screen console

Scanned images









Functional characteristics

Ray source setting

Power-on self-test With the function of fault self-check, automatically judge the fault and prompt the fault code information in time.

Image processing 1-64times enlargement continuity.

With the function of Color/BW, negative, high/low penetration, organic/inorganic stripping,

general enhancement, and pseudo color, etc.

Image Recall 30 preceding images recallable.

The number of images stored Up to 10,00 images stored automatically.

Real-time curve The real-time curve can be used to detect whether the acquisition system and components work normally.

Time setting System time can be set

Probe setting It can realize the manual deletion of the low and low energy detection board dead pixels,

and display the deleted dead pixels in the display area.

Alarm system The alarm function can be activated and deactivated, and the alarm type of the alarm box,

sound and light alarm can be selected, and the sensitivity, minimum absorption rate,

maximum absorption rate, and alarm duration can be set.

Troubleshooting It can realize whether the components such as the entrance and exit light barrier, side panel switch, emergency

stop switch and light source are normal, and display the standard value and current value of the detection voltage

There are two source and analog source control modes, the source parameters of the digital source can be set.

Image setting

The drum running control direction and the image display moving direction can be set.

Software registration It can realize software registration function and has serial number, registration code,

registration status and system time information display.

User login Log in by entering different user name and passwords, only when logging in can you make other settings.

User management You can add, delete, edit the user name and password, set the user level to restore the deleted user.

Authority management Different default permissions can be set according to user level.

language settings The system language can be set to switch between Chinese and English.

Log management User operations can be monitored to query user actions.

About The version and device number can be displayed.

TIP report

The report can be generated by the tip operation after the tip insertion function is turned on, and the

content of the report: user name, number of tip insertions, number of tags, false positive rate,

probability of detection, probability of false positives.

Tip management It can be set to enable and disable the insertion of dangerous goods, and can set the identification time,

Prompt time, insertion frequency, proportion of single items inserted into dangerous goods, add tip files

and delete files.

Document management It can query, open, and export the checked image.

Function setting It can set log level, save the file time, whether to open the training function and setting the smart roller.

Data setting

Display system working hours, the total working hours of the ray source, the total number of system

Display system working hours, the total working hours of the ray source, the total number of system

baggage and packages, and the total number of baggage packages this time, and clear the above data.

 $type, \ whether \ to \ enable \ the \ debug \ model, \ model, \ and \ gain, \ enter \ the \ corresponding \ IP \ address \ on \ network$

connection to realize sharing function, and have corresponding software to achieve system upgrade.

Compliance

 $\verb|*ISO19001|; SO14001|; ISO27001|; OHSMS18001|; CE|, ROHS, FCC|, REACH, USA, FDA|\\$

International *Health Inspection Report

National (China) *Computer Software Copyright Registration Certificate

*Software Product Registration Certificate

*Radiation Safety Certificate from Ministry of Public Security

*Quality Certification from Safety and Police Electronic Products Quality Inspection Center

*Design pantent certification

SAFEWAY INSPECTION SYSTEM LIMITED



Mobile&Whatsapp: + 86- 136 7021 3490 Skype: sophia.xiong8105

Email: sophia@safeway-system.com Website: www.safeway-system.com

